


ANSI 150#RF CAST STEEL 'Y' TYPE STRAINER

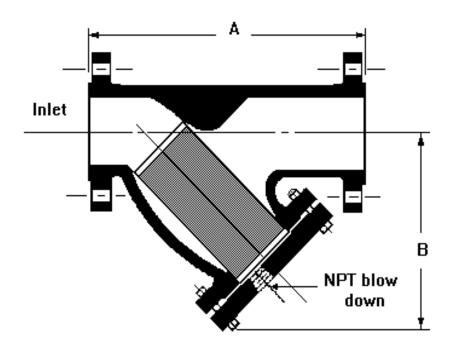

	DIMENSIONS				
SIZE	Α	В	Blowdown (NPT)	Standard Filtration	WEIGHT (LBS)
2"	8.5/8"	4.7/8"	1/2"	3/64" perf	20
2.1/2"	10.1/4"	7.1/2"	3/4"	3/64" perf	30
3"	11.5/8"	7.3/4"	1"	3/64" perf	40
4"	14.3/8"	9.1/8"	1.1/2"	1/8" perf.	70
6"	18.5/8"	13.3/8"	2"	1/8" perf.	130
8"	24.3/8"	14.5/8"	2"	1/8" perf.	195
10"	26"	17.1/4"	2"	1/8" perf.	310
12"	30.3/8"	21"	2'	1/8" perf.	460

Pressure & Temperature Ratings

150 psig @ 567°F 285 psig @ 100°F Steam WOG

- <u>Standard Features</u>
 * Bolted Blind Flange Cover
- * Stainless Steel Basket
- * NAF Cover Gasket
- * Cast Steel Body & Cover ASTM A216 WCB

- Options:
 * Cast Iron, Bronze, Stainless Steel, High Alloy materails
- * DP Connections
- * Heavy wall and/or wedge wire basket
- * Spiral wound gasket