


MODEL FYC-125-CI



ANSI 125#FF CAST IRON 'Y' TYPE STRAINER

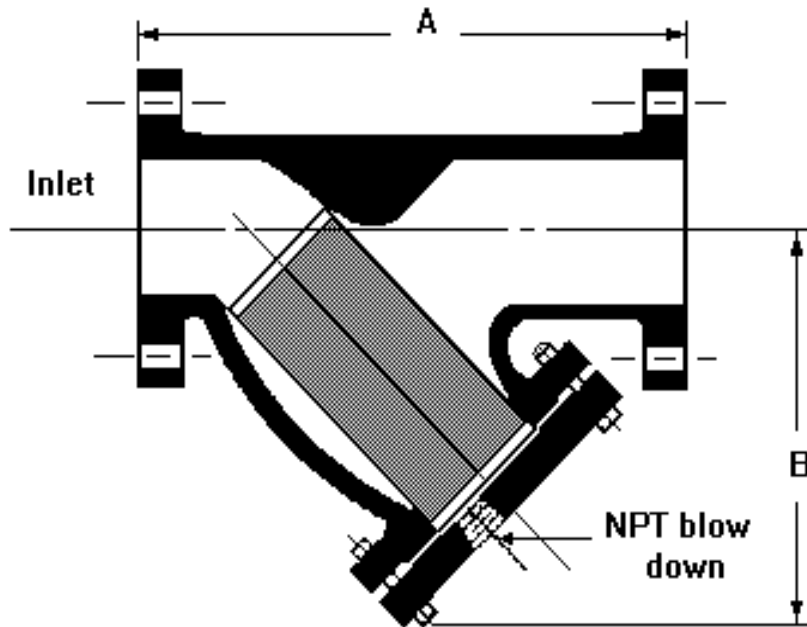

SIZE	DIMENSIONS		Blowdown (NPT)	Standard Filtration	WEIGHT (LBS)
	A	B			
2"	7-7/8"	7"	1/2"	1/16" perf	21
2.1/2"	10"	9-3/4"	1"	1/16" perf	32
3"	10-1/8"	10"	1"	1/16" perf	39
4"	12-1/8"	12"	1-1/2"	1/8" perf.	69
6"	18-1/2"	20"	2"	1/8" perf.	153
8"	21-5/8"	22-3/4"	2"	1/8" perf.	284
10"	25-3/4"	28"	2"	1/8" perf.	426
12"	29-7/8"	30"	2"	1/8" perf.	667

Pressure & Temperature Ratings

Steam 125 psig @ 344°F
 WOG 200 psig @ 100°F

Standard Features

- * Bolted Blind Flange Cover
- * Stainless Steel Basket
- * NAF Cover Gasket
- * Cast Iron Body & Cover ASTM A126 Class B

Options:

- * Cast Steel, Bronze, Stainless Steel, High Alloy materials
- * DP Connections
- * Heavy wall and/or wedge wire basket
- * Spiral wound gasket