


MODEL FYC-300-CS



ANSI 300#RF CAST STEEL 'Y' TYPE STRAINER

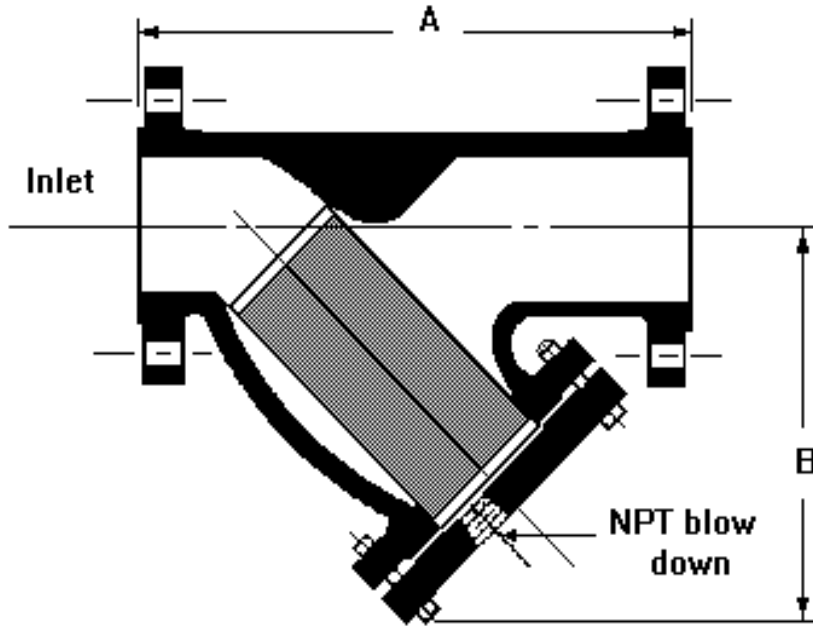

SIZE	DIMENSIONS		Blowdown (NPT)	Standard Filtration	WEIGHT (LBS)
	A	B			
2"	7-13/16"	6-1/8"	1/2"	3/64" perf	50
2.1/2"	10-11/16"	7-7/16"	1"	3/64" perf	64
3"	12-9/16"	9"	1-1/4"	3/64" perf	94
4"	16-5/8"	11"	1.1/2"	1/8" perf.	165
6"	19-3/4"	15-1/2"	2"	1/8" perf.	260
8"	25"	16-1/4"	2"	1/8" perf.	385
10"	29-1/8"	19-1/4"	2"	1/8" perf.	610
12"	33-3/4"	24"	2"	1/8" perf.	1300

**Pressure & Temperature Ratings**

Steam 300 psig @ 417°F  
 WOG 740 psig @ 100°F

**Standard Features**

- \* Bolted Blind Flange Cover
- \* Stainless Steel Basket
- \* NAF Cover Gasket
- \* Cast Steel Body & Cover ASTM A216 WCB

**Options:**

- \* Cast Iron, Bronze, Stainless Steel, High Alloy materials
- \* DP Connections
- \* Heavy wall and/or wedge wire basket
- \* Spiral wound gasket